

Subject to prior Sale we offer for Sale:
Horizontal Machining Center
MORI SEIKI NH 5000 DCG/40


Features:

- CNC FANUC 31iA (MSX-701) with 19" Screen with:
 - o spiral interpolation
 - o high-speed contouring control I and II
 - o tool compensation
- 4th Axes for Pallet-Table
- Tool-Breakage-Control and lifetime control
- Through Spindle Coolant
- Multi angle rounding/chamfering functionality
- KNOLL Filtration- and High-Pressure Coolant Unit 30 and 70 bars
- KNOLL pump unit for external coolant (5-7 bar / 100 L/Min)

Main Data:

X/Y/Z	730 / 730 / 850 mm
Pallet Size	500 x 500 mm
Spindle Speed	14.000 rpm
Spindle Dia	195 mm
No. of Tools in ATC	60 Tools
Tool Taper	BT – 40 Type B



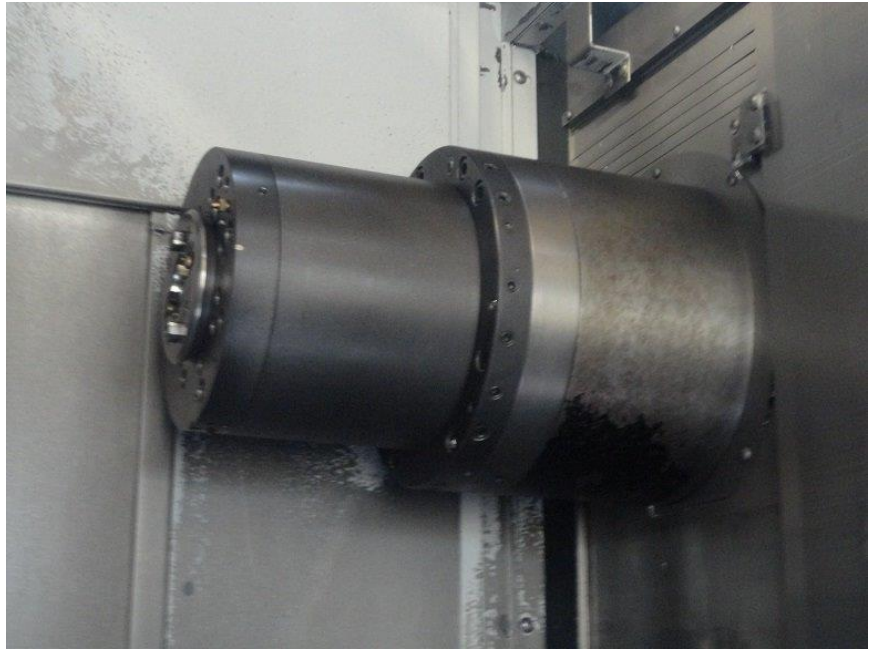

Technical drawing of the Y-axis protector assembly, showing dimensions in mm.

Top View Dimensions:

- Overall width: 850.0
- Distance from center to mounting flange: 300
- Distance from center to sensor cover: 650
- Distance from center to Y-axis protector: 810
- Distance from center to sensor cover (alternative): 340
- Distance from center to Y-axis protector (alternative): 810
- Distance from center to sensor cover (alternative): 340
- Distance from center to Y-axis protector (alternative): 810

Side View Dimensions:


- Overall height: 850.0
- Distance from center to mounting flange: 300
- Distance from center to sensor cover: 650
- Distance from center to Y-axis protector: 810
- Distance from center to sensor cover (alternative): 340
- Distance from center to Y-axis protector (alternative): 810
- Distance from center to sensor cover (alternative): 340
- Distance from center to Y-axis protector (alternative): 810


Front View Dimensions:

- Overall width: 850.0
- Distance from center to mounting flange: 300
- Distance from center to sensor cover: 650
- Distance from center to Y-axis protector: 810
- Distance from center to sensor cover (alternative): 340
- Distance from center to Y-axis protector (alternative): 810
- Distance from center to sensor cover (alternative): 340
- Distance from center to Y-axis protector (alternative): 810


Other Dimensions:



- Distance from center to mounting flange: 300
- Distance from center to sensor cover: 650
- Distance from center to Y-axis protector: 810
- Distance from center to sensor cover (alternative): 340
- Distance from center to Y-axis protector (alternative): 810
- Distance from center to sensor cover (alternative): 340
- Distance from center to Y-axis protector (alternative): 810

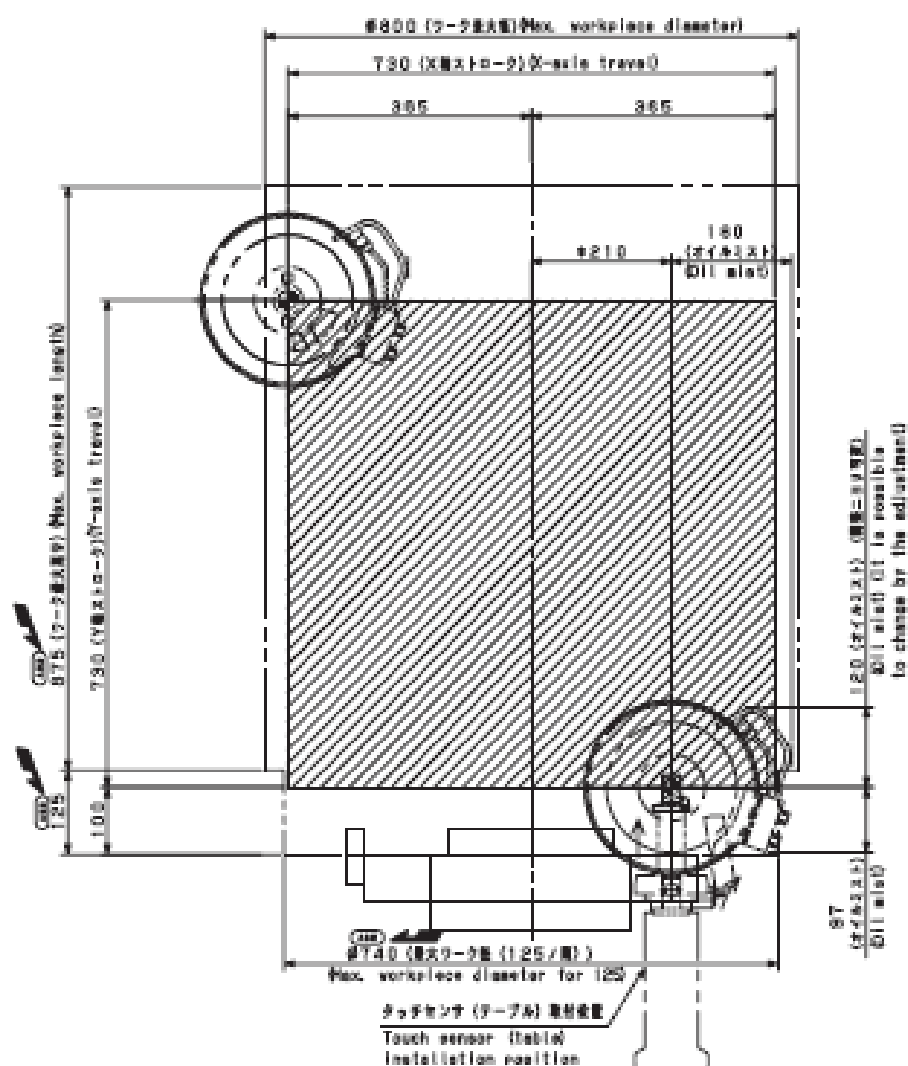




Machine Views and Dimensions:

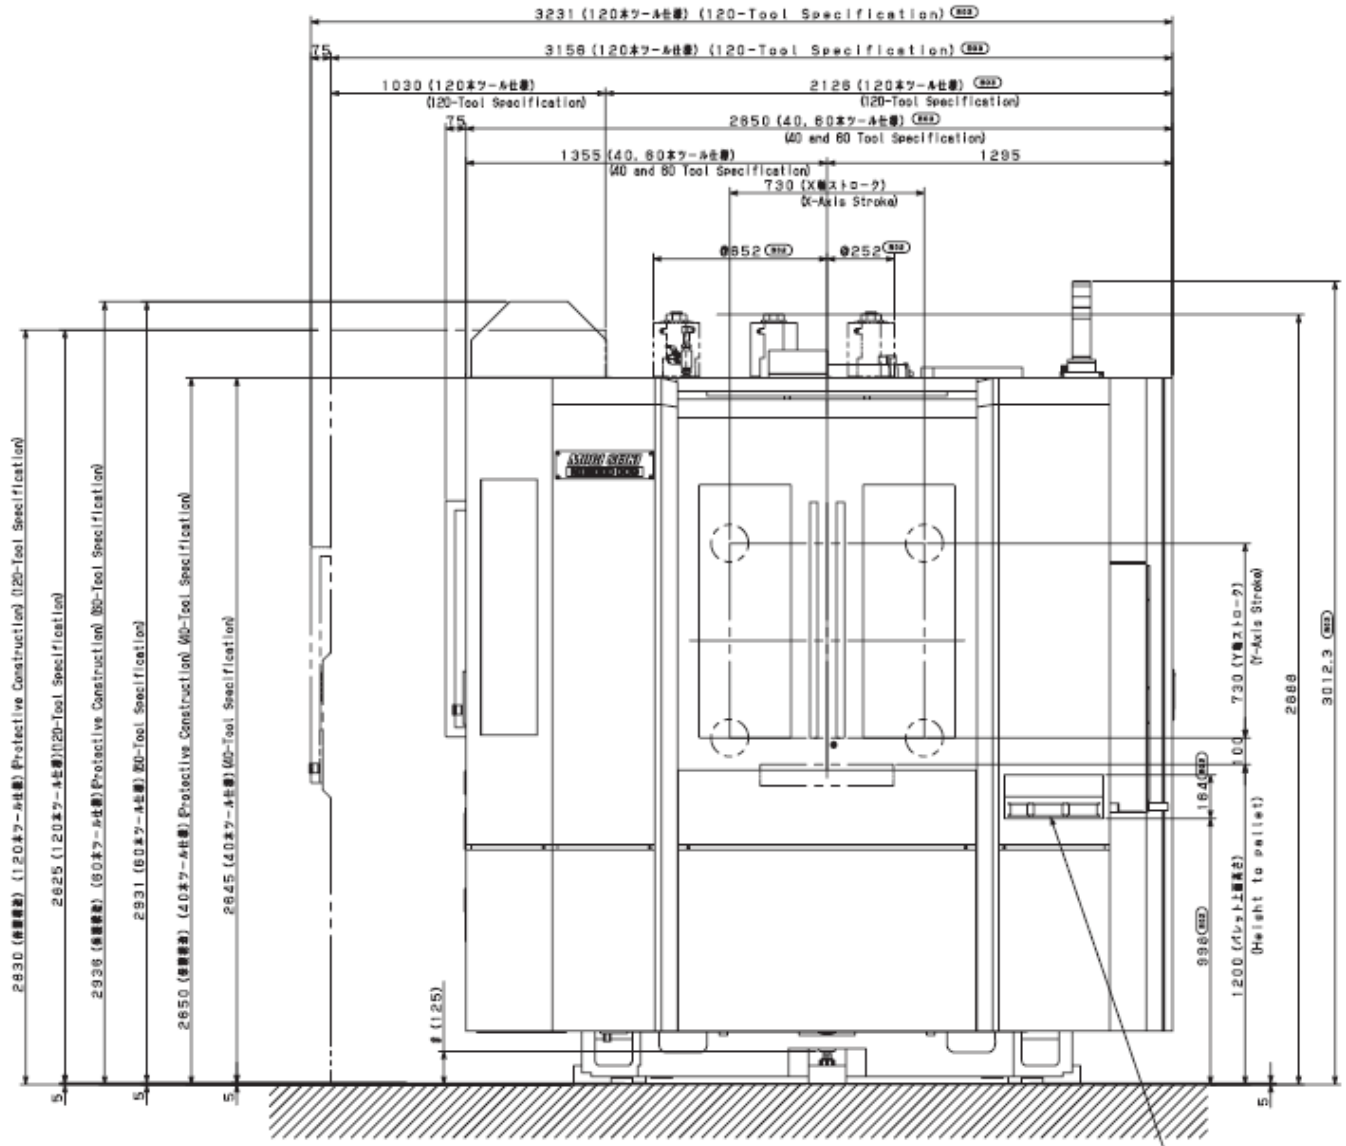

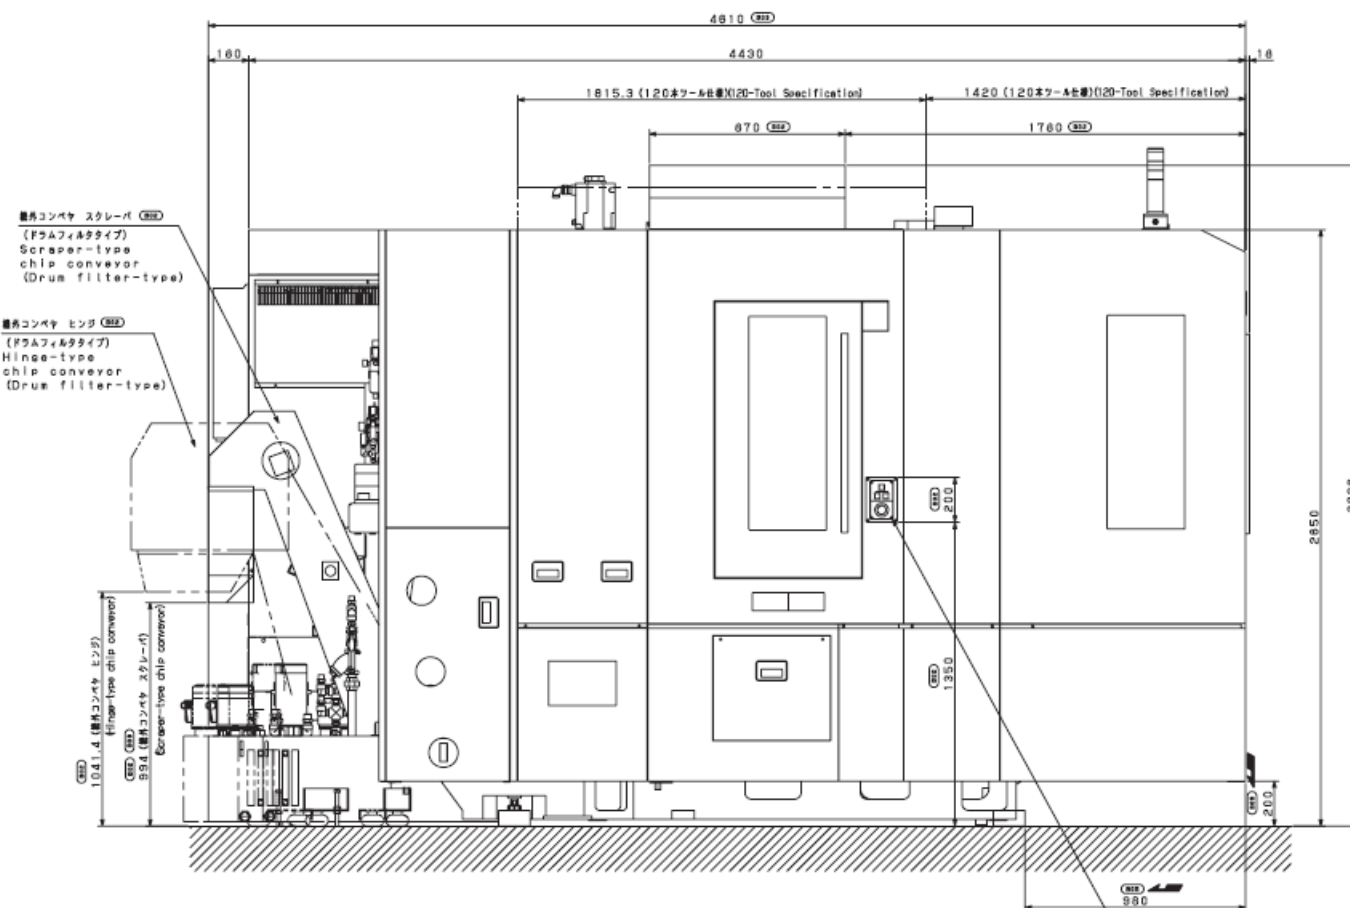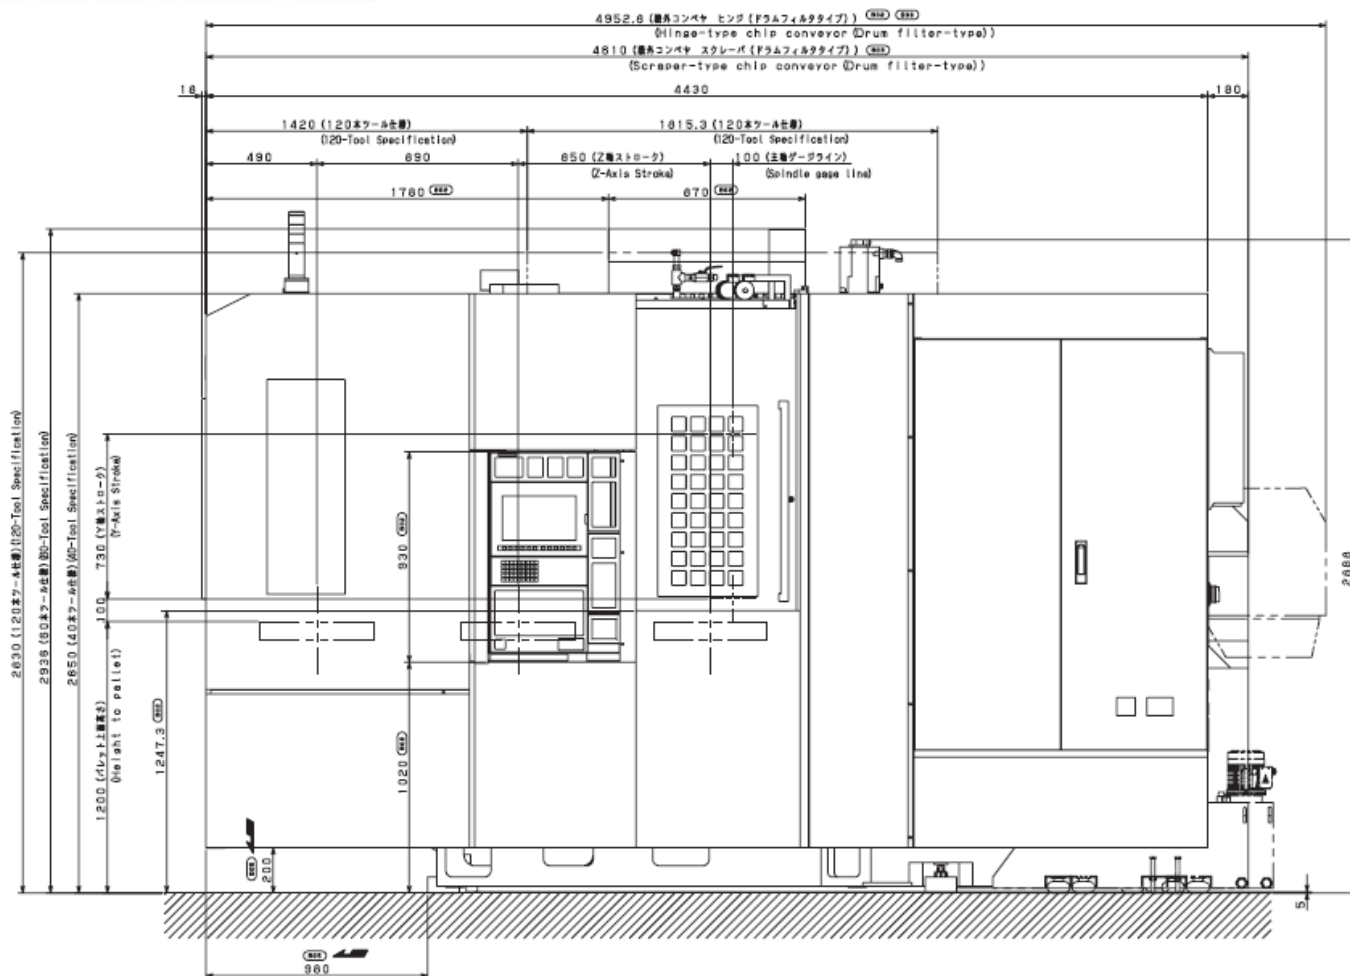

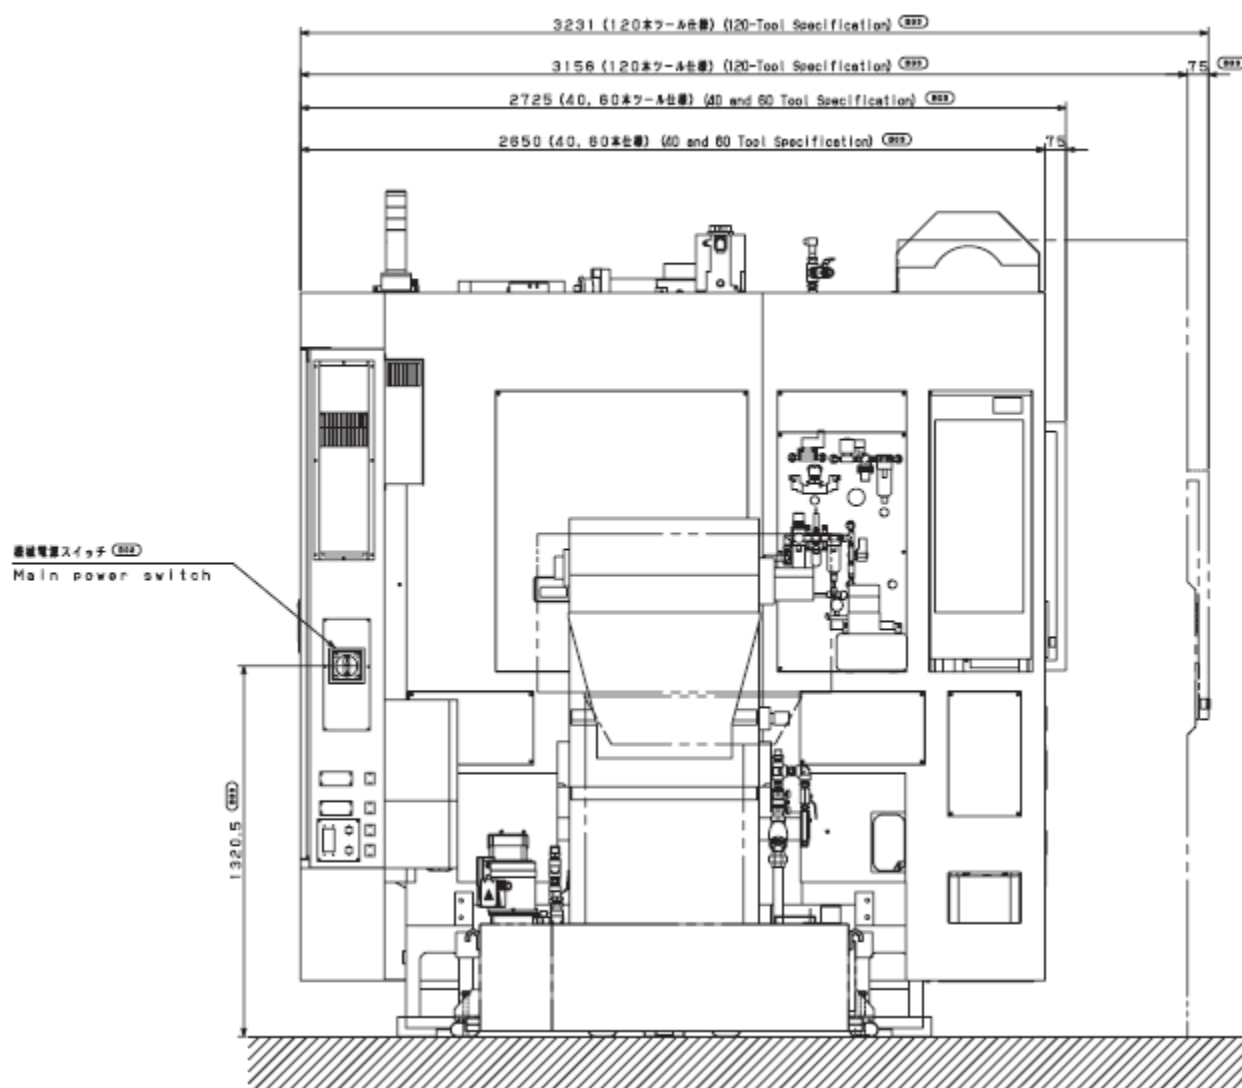

Contact: europe@maynards.com

All Information and prior Sale reserved. Our actual T&Cs apply.